

# MFSC

## 2000W~3000W

### Single Module CW Fiber Laser



## Product Feature

Premium components, superior performance and longer lifetime



### Up to 6KW Output From CW Single Module Series

Better beam quality vs. multi module lasers  
Greatly improved efficiency



### Excellent Material Processing Performance

High speed in thin sheet cutting  
Strong capability in thick material processing



### Compact Design, Maintenance Free

Highly integrated system with modular design  
Easy maintenance significantly reduce TCO



### Smaller Size with Higher Stability

>60% reduction in volume  
Higher flexibility when integrated in to system



### High Level Vertical Integration



All key components are designed and produced in house  
Strict quality control, high consistency and reliability

**MAX** PHOTONICS

## MFSC 2000W~3000W Fiber Laser Specifications

Models	MFSC-2000W	MFSC-3000W
<b>OPTICAL SPECIFICATIONS</b>		
Nominal Power	2000W	3000W
Mode of Operation	CW/Modulated	
Polarization	Random	
Power Tunability	10 to 100 %	
Wavelength	1080 ± 10 nm	
Power Stability	± 1 %	
Laser Beam Quality, BPP	1.1 to 1.5 mm x mrad(50um QBH)	
	2.8 to 3.6 mm x mrad(100um QBH)	
Modulation Frequency	≤ 5 kHz	
Preview Red Light Power	200 μW	
<b>FIBER DELIVERY SYSTEM</b>		
Interface	QBH (LOC)	
Length	15 m standard, other lengths optional	20 m standard, other lengths optional
Diameter	50(100/200) μm	
Bending Radius	200 mm	
<b>ELECTRICAL RATINGS</b>		
Supply Voltage	400VAC (-15% to +10%) 3-phase	
<b>OTHER SPECIFICATIONS</b>		
Operating Temperature	+10 to +40 °C	
Storage Temperature	-10 to +60 °C	
Humidity	10 to 85 %	
Cooling Method	Water Cooling	
Cooling Medium	Distilled water/ Glycol Antifreeze	
Dimension	482.6×950×193 mm	
Weight	72(±3) kg	80(±3) kg

## Mechanical Specifications (mm)

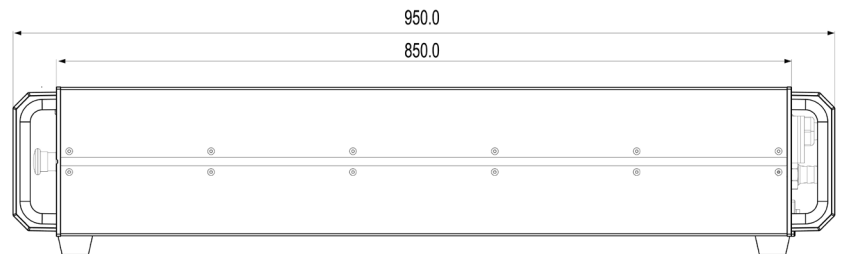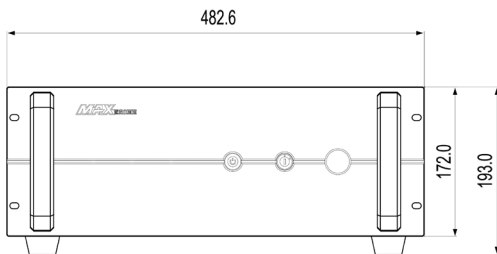

**Maxphotonics Co.,Ltd.**

Address: Maxphotonics Industrial Park, 3rd Furong Road,  
Furong Industrial Area, Shajing, Bao'an, Shenzhen, China.518125  
E-Mail: sales@maxphotonics.com <http://en.maxphotonics.com>

**MAX PHOTONICS**