

# MFSQ

## 150/1500W

### QCW Fiber Laser



## Product Feature



### All-fiber Structure

Compact and rugged design for long time operation



### Adjustable Pulse Width Waveform

The output waveform can be customized according to different welding or cutting applications



### Compact Design, Maintenance Free

Plug and play, higher flexibility when integrated into system




### High Level Vertical Integration

All key components are designed and produced in house  
Strict quality control, high consistency and reliability

## Characteristic Parameters

Model	MFSQ-150/1500W
<b>OPTICAL SPECIFICATIONS</b>	
CW Mode Max Power	250W
Pulsed Mode Max Power	1500W
Mode of Operation	CW/Modulated
Polarization	Random
Power Tunability	10 to 100%
Wavelength	1080 ± 10 nm
Power Stability	2%
Laser Beam Quality M <sup>2</sup>	1.3(20um)
Pulse Energy	15 J
Pulse Duration	0.1~50 ms
Repetition Rate	1~5000 Hz
Preview Red Light Power	100 μW
<b>FIBER DELIVERY SYSTEM</b>	
Interface	QBH (LOC)
Length	10 m standard, other lengths optional
Diameter	20/50 μm
Bending Radius	200 mm
<b>ELECTRICAL RATINGS</b>	
Supply Voltage	220VAC
Rated Power	3 KW
<b>OTHER SPECIFICATIONS</b>	
Operating Temperature	+10 to +40°C
Storage Temperature	-10 to +60°C
Humidity	10 to 85%
Cooling Method	Air Cooling
Dimension	586×420×142 mm
Weight	34 kg

## Mechanical Specifications (mm)

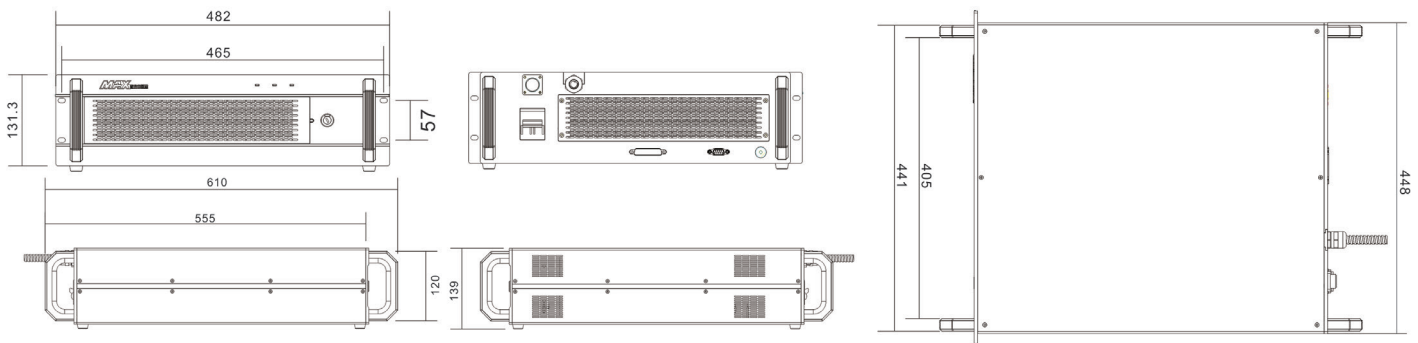

**Maxphotonics Co., Ltd.**

Address: Maxphotonics Industrial Park, 3rd Furong Road,  
Furong Industrial Area, Shajing, Bao'an, Shenzhen, China.518125  
E-Mail: [sales@maxphotonics.com](mailto:sales@maxphotonics.com) <http://en.maxphotonics.com>

**MAX** PHOTONICS